

SPECIALS

Stainless Steel Electrodes Vacuum Sealed



308L

AWS A5.4 E308L-16



309L

AWS A5.4 E309L-16



- For general purpose applications where corrosion conditions are moderate
- Not for mild steel to stainless joining applications
- Used more commonly for welding AISI types 304L, 308L, 321, and 347

- For welding 309, 309L as well as other 300 series
- Excellent for joining stainless steel to mild or carbon steels, buttered passes on steel overlay work and for welding AISI 304 clad stainless

Part Number	10 lb box
WE308L16093	E308L-16 3/32"
WE308L16125	E308L-16 1/8"
WE308L16156	E308L-16 5/32"
WE308L16187	E308L-16 3/16"

Part Number	10 lb box
WE309L16093	E309L-16 3/32"
WE309L16125	E309L-16 1/8"
WE309L16156	E309L-16 5/32"
WE309L16187	E309L-16 3/16"

Call for Volume Pricing

Call for Volume Pricing

316L

AWS A5.4 E316L-16



312

AWS A5.4 E312-16



- For welding low carbon molybdenum-bearing austenitic alloys
- Resistance to pitting, many acids and general corrosion

- All Position
- For repair of earth moving equipment, modification of dies, repair of broken machinery, joining wear plates and repairing unknown steel components

Part Number	10 lb box
WE316L16093	E316L-16 3/32"
WE316L16125	E316L-16 1/8"
WE316L16156	E316L-16 5/32"
WE316L16187	E316L-16 3/16"

Part Number	10 lb box
WE31216093	E312-16 3/32"
WE31216125	E3012-16 1/8"
WE31216156	E312-16 5/32"
WE31216187	E312-16 3/16"

Call for Volume Pricing

Call for Volume Pricing



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Due to marketplace volatility, prices are subject to change without notice.

Mild Steel Electrodes Vacuum Sealed



6010

AWS A5.1 E6010



6011

AWS A5.1 E6011



- All-Position, Multiple-Pass
- For pressure pipes, pressure vessels, oil marine platforms, storage tanks, ship hulls, buildings, and galvanized steel storage tanks

- All-Position, Multiple-Pass
- Great electrode to use with minimal preparation
- For car and truck frames, farm implements, storage tanks, and galvanized steel.

Part Number	10 lb box
WE6010093	E6010 3/32"
WE6010125	E6010 1/8"
WE6010156	E6010 5/32"
WE6010187	E6010 3/16"

Part Number	10 lb box
WE6011093	E6011 3/32"
WE6011125	E6011 1/8"
WE6011156	E6011 5/32"
WE6011187	E6011 3/16"

Also available in 5 lb box
Call for Volume Pricing

Also available in 5 lb box
Call for Volume Pricing

6013

AWS A5.1 E6013



6022

AWS A5.1 E6022



- All-Position
- Designed for thin sheet metal or light gauge steel but with sufficient penetration for welding medium gauge steels

- For burn-through spot welding of roof decking to support beams
- Fast down-hand, single pass welding of light gauge materials such as sheet metal
- Excellent strike and restrike action

Part Number	10 lb box
WE6013093	E6013 3/32"
WE6013125	E6013 1/8"
WE6013156	E6013 5/32"
WE6013187	E6013 3/16"

Part Number	10 lb box
WE6022125	E6022 1/8"
WE6022156	E6022 5/32"

Also available in 5 lb box
Call for Volume Pricing

Also available in 5 lb box
Call for Volume Pricing



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Due to marketplace volatility, prices are subject to change without notice.

Mild Steel Electrodes Vacuum Sealed



7014

AWS A5.1 E7014



- Easy to use, high speed electrode for welding carbon and low alloy steels
- used for tack welding sheet metal or galvanized, rusty or dirty plate steels, ornamental iron, mobile home frames, automobiles and railcars, storage tanks, machine parts, structural steel for buildings

Part Number	10 lb box
WE7014093	E7014 3/32"
WE7014125	E7014 1/8"
WE7014156	E7014 5/32"
WE7014187	E7014 3/16"

Also available in 5 lb box
Call for Volume Pricing

7018

AWS A5.1 E7018 H4



- All-Position, Multiple-Pass
- Excellent charpy impact values at sub-zero temperatures (65 ft-lbs at -20°)
- For structural and fabrication steels such as beams, angles, channels and plates, cast steels, process piping steels, cold rolled steel, and shipbuilding steels

Part Number	10 lb box
WE7018093	E7018 3/32"
WE7018125	E7018 1/8"
WE7018156	E7018 5/32"
WE7018187	E7018 3/16"

Also available in 5 lb box
Call for Volume Pricing

7018R

AWS A5.1 E7018 H4R



- Premium moisture resistant coating
- Excellent restrike without porosity
- Reduced moisture pickup vs. Inweld 7018

Part Number	10 lb box
WE7018R093	E7018R 3/32"
WE7018R125	E7018R 1/8"
WE7018R156	E7018R 5/32"
WE7018R187	E7018R 3/16"

Also available in 5 lb box
Call for Volume Pricing

7024

AWS A5.1 E7024



- Single pass welding on horizontal or flat fillet welds
- Used on heavy construction and earth moving equipment, truck bodies, ships barges, and railcars, as well as many other mild steel and alloy steel applications.

Part Number	10 lb box
WE7024093	E7024 3/32"
WE7024125	E7024 1/8"
WE7024156	E7024 5/32"
WE7024187	E7024 3/16"

Also available in 5 lb box
Call for Volume Pricing



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Due to marketplace volatility, prices are subject to change without notice.

Rod Ovens

- 150C max temp
- Analog thermostat



Part Number

AUEQ10SET	10 lb
AUEQ20S	20 lb
AUEQ50SW	50 lb

100 lb Electrode Bench Oven



Part Number
AUEQ100DT3

Welding Table with Casters

- Galvanized 14Ga Steel Sheet Table Top
- 36" x 20"
- Slag Tray
- 220 lb Capacity
- Assembly Required
- Box Dimensions: 37" x 21" x 5"



Part Numbers
MIWT362036NT2

Portable Welding Table

- Galvanized 14Ga Steel Sheet Table Top
- 40" x 24"
- Folding Legs
- 400 lb Capacity
- Limited Assembly Required
- Box Dimensions: 46" x 27" x 5"



Part Numbers
MIWT402436V2



HELIOS 210 Stick Welder



Kit includes:

- Helios 210 stick welder
- Electrode holder and 10' cable
- Ground clamp and 10' cable
- Dual voltage input adapter
- Shoulder strap

Part Number
HE210STICK

While Supplies Last

Due to marketplace volatility, prices are subject to change without notice.

Cable Assemblies with OEM Connections



- Built with OEM Holders, Ground Clamps and Cable Connectors
- Printed Sequentially
- EPMD Jacket



Part #

CA1050LC4MF

1/0 FP BLK 50' W/LC40 M&F Lead Assembly

CA10100LC4MF

1/0 FP BLK 100' W/LC40 M&F Lead Assembly

CA2010GC2LC4M


2/0 FP BLK 10' W/GC200 & LC40 M Ground Assembly

CA210A53221MPCM

#2 FP BLK 10' W/A532 & 2-1MPC Male Stinger Assembly

CA210AF2LC1040M

#2 FP BLK 10' W/AF-2 & LC1040 Male Stinger Assembly

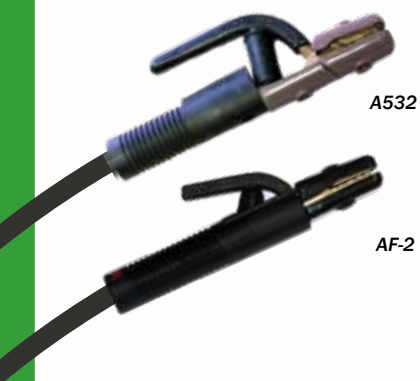

A532

AF-2



LC40

GC200

Cut Length Cable and Reels

- Printed Sequentially
- EPMD Jacket



Part #

WC1/0X25

1/0 AWG Welding Cable 25'

WC1/0X50

1/0 AWG Welding Cable 50'

WC1/0X100

1/0 AWG Welding Cable 100'

WC2/0X25

2/0 AWG Welding Cable 25'

WC2/0X50

2/0 AWG Welding Cable 50'

WC2/0x100

2/0 AWG Welding Cable 100'



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Due to marketplace volatility, prices are subject to change without notice.

DOT High Pressure Steel Cylinders

- Painted black or grey
- 580 valved
- Cap included on 80 and 125 cubic foot cylinders
- DOT certified
- Standard prepaid freight policies apply
- Priced each by quantity discount
- 36 per pallet



Part Number

DOTCYL20CF580

DOTCYL40CF580

DOTCYL55CF580

DOTCYL125CF580

70S-6

AWS A5.18 70S6

- Engineered for automotive welding applications
- Very stable arc at high wire feed speeds
- Premier choice for spray transfer applications



Part Number

0270S6023	0.023 x 2lb Spool
0270S6030	0.030 x 2lb Spool
0270S6035	0.035 x 2lb Spool
1170S6023	0.023 x 11lb Spool
1170S6030	0.030 x 11lb Spool
1170S6035	0.035 x 11lb Spool
3370S6035LW	0.035 x 33lb Spool
3370S6045LW	0.045 x 33lb Spool
4470S6035	0.035 x 44lb Spool
4470S6045	0.045 x 44lb Spool
50070S6035	0.035 x 550lb Drum
50070S6045	0.045 x 550lb Drum

Call for Volume Pricing

Inweld 71T-GS Mild Steel Flux-Cored MIG Wire

AWS A5.20 71TGS

- Works well on small 110 volt power source/feeders
- Single pass welding of thin-gauge carbon steel, ranging from 3/16 Inch to 22 gauge
- Requires no external gas-shielding
- For lap and butt welds on galvanized sheet metal, repair of automobile sheet metal, welding ductwork and joining of galvanized sheet metal



Part Number

0271TGS030	0.030 x 2 lb Spool
0271TGS035	0.035 x 2 lb Spool
1071TGS030	0.030 x 10 lb Spool
1071TGS035	0.035 x 10 lb Spool

Anti-Spatter Plant Based

FEATURES AND BENEFITS

- Ready to use aerosol
- Dries instantly
- Non-toxic & biodegradable
- No chlorinated solvents
- Odorless
- Silicone free for easy painting



APPLICATION

- Prevents spatter build up on MIG nozzles, tips, fixtures and metals during welding

Part Number

ANTISPATPB



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

71T-1 Flux-Cored Carbon Steel Wire

AWS A5.20 71T1MC



- For welding mild and medium carbon steels in all positions.
- Lower spatter and fume emissions than conventional products in this class
- Used where a minimum tensile strength of 70,000 psi is required in the deposited weld metal
- Provides optimum welding performance in argon/carbon dioxide shielding gas but is also formulated to perform very well with 100% CO2

Stainless Flux-Cored Wire For Gasless Applications



- Self-shielded, flux-cored, and stainless steel electrode
- To weld in the flat and horizontal positions
- Shielding gas not required

Part Number

71T-1

1071T1035	0.035" x 10lb
1071T1045	0.045" x 10lb
3371T1045	0.045" x 33 lb
4471T1052	0.052" x 44lb
50071T1045	0.045" x 440lb

71T1-9 (Seismic Rated)

3371T1-9C/9M045	0.045" x 33lb
-----------------	---------------

Call for Volume Pricing

1 lb spool

01308LT03030	E308LT0-3 .030"
01308LT03035	E308LT0-3 .035"
01309LT03030	E309LT0-3 .030"
01309LT03035	E309LT0-3 .035"
01316LT03030	E316LT0-3 .030"
01316LT03035	E316LT0-3 .035"



2 lb spool

02308LT03030	E308LT0-3 .030"
02308LT03035	E308LT0-3 .035"
02309LT03030	E309LT0-3 .030"
02309LT03035	E309LT0-3 .035"
02316LT03030	E316LT0-3 .030"
02316LT03035	E316LT0-3 .035"

10 lb spool

10308LT03030	E308LT0-3 .030"
10308LT03035	E308LT0-3 .035"
10309LT03030	E309LT0-3 .030"
10309LT03035	E309LT0-3 .035"
10316LT03030	E316LT0-3 .030"
10316LT03035	E316LT0-3 .035"



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Due to marketplace volatility, prices are subject to change without notice.

WELDING HELMETS

AVAILABLE NOW!



2 X 4.25 Lift Front Welding Helmet



- Lift Front 2" X 4.25" Welding Helmet
- Passive Shade (Shade 11 Poly Lens Installed)
- 8 per Case

Part Number
WH032L

WH032LHG Replacement Headgear

4 X 5 Fixed Front Welding Helmet



- Fixed Front 4.5" X 5.25" Welding Helmet
- Passive Shade (Shade 10 Lens Installed)
- 8 per Case

Part Number
WH035FIXED

WH035FIXEDHG
Replacement Headgear

Advantage Series Welding Helmet with ADF



- 3.54" x 1.57" view size
- Solar operated
- 2 independent arc sensors
- Internal controls for maximum protection
- Adjustable 3 position sensitivity control L/M/H
- Adjustable 3 position delay control S/M/F
- Designed for both welding and grinding
- Comfortable push and twist adjustment allows custom fit
- Lightweight material construction ideal for extended use
- Offers excellent neck and head protection
- Meets ANSI Z87.1 and CSA certified to CAN/CSA Z94.3 standards

Part Number
S26100

Advantage Plus Series Welding Helmet with ADF



- 3.94" x 2.36" view size
- Wider viewing area is ideal for difficult work angles
- 4 independent arc sensors
- Internal controls for maximum protection
- Adjustable sensitivity and delay controls
- Solar and battery operated
- Grind mode includes warning indicator
- Comfortable push and twist adjustment allows custom fit
- Lightweight material construction ideal for extended use
- Meets ANSI Z87.1 and CSA certified to CAN/CSA Z94.3 standards

Part Number
S26200



Portable Weld & Cut Kit V Style

Kit Includes:

- Oxygen regulator: V155-OX
- Acetylene regulator: V155-AC
- Torch handle: V100
- Cutting attachment: V1350
- Cutting tip: 0-3-101
- Welding tip: VM-W0
- 12.5' x 3/16" twin hose with "B" fittings
- Check valves
- Goggles
- Tip cleaner,
- Spark lighter
- 8 way tank wrench
- Cylinder tote



Part Number
CUTKITPORT
CYLTOE



Medium Duty Regulators

- Designed for medium capacity applications
- Single stage design brass body
- Clamshell Packaging



Part Number
REG350ACET300
REG350ACET510
REG3500XY540

Air Acetylene Brazing Kit

Kit Includes:

- Torch Handle A
- Regulator CGA B & MC "A"
- Swirl Flame Tips
 - Tip air acetylene qd swirl A5 7/32" ID
 - Tip air acetylene qd swirl A8 1/4" ID
 - Tip air acetylene qd swirl A14 3/8" ID
 - Tip air acetylene qd swirl A32 1/2" ID
- Hose with Fitting "A"



Part Number
CUTKITAA

- | | |
|----------------------|---|
| REG250ACET510 | Acet. Reg. Med Duty 250 CGA 510 |
| AAHANDQD | Replacement Handle Quick Disconnect B Valve |
| TIPAIRACETA3 | Tip Air Acet. Quick Disconnect Swirl A3 |
| TIPAIRACETA5 | Tip Air Acet. Quick Disconnect Swirl A5 |
| TIPAIRACETA8 | Tip Air Acet. Quick Disconnect Swirl A8 |
| TIPAIRACETA11 | Tip Air Acet. Quick Disconnect Swirl A11 |
| TIPAIRACETA14 | Tip Air Acet. Quick Disconnect Swirl A14 |
| TIPAIRACETA32 | Tip Air Acet. Quick Disconnect Swirl A32 |



TWIN Hose

Grade R

- For Acetylene gas only
- Tube and Cover Are Not Flame And Oil Resistant



F Clamps

- Profiled rail and spatter resistant spindle
- High quality heat-treated steel and plated for strength and durability
- Arm made from tempered, drop-forged steel
- Reversible arm converts the holding clamp to a spreader bar
- Replaceable swivel



Part Number

1200 PSI

HT1212	12"
HT1224	24"
HT1232	32"

Part Numbers	Description	Case Qty.
1/4" Grade R		
HTD1425BB	1/4 x 25' BB Fittings	10
HTD1450BB	1/4 x 50' BB Fittings	5
HTD14100BB	1/4 x 100' BB Fittings	2
HTD14RE	1/4 x 400' Reel	1

C Clamp Pliers



Part Number

HTLP06	6"
HTLP09	9"
HTLPSP06	6" w/ swivel pads
HTLPSP09	9" w/ swivel pads

150 Amp Miller® Style MIG Gun

- 10' Lead
- Air Cooled
- 150 amps
- Uses standard Miller style consumables



Part Number

AUM10GUN

Stock on Hand

303

Boxed Cylinder Carts

Assembly Required



*



#



^



Part Number

CYC191042A10

Cont. Handle, 19" x 10" base, 42"H, 10" air tires

CYC191041SR8 #

Cont. Handle, 19" x 10" base, 41"H, 8" solid tires

CYC191042SR10 ^

Cont. Handle, 19" x 10" base, 42"H, 10" solid tires

CYC140649SR10 *

Cont. Handle, 14" x 6" base, 49"H, 10" solid tires



INVENTORY REDUCTION



150 Amp Hobart® Style MIG Gun

- 10' Lead
- Air Cooled
- 150 amps
- Uses standard Miller style consumables

Part Number

AUH10GUN

Stock on Hand

53



150 Amp Lincoln® Style MIG Gun

- 10' Lead
- Air Cooled
- 150 amps
- Uses standard Tweco style consumables

Part Number

AUL10GUN

Stock on Hand

234



- 10' lead
- Air Cooled
- 22.5 volts, 135 amps, 30% duty cycle using Argon shielding gas
- 4" (102 mm) max. spool size

Hobart® Style Spool Gun

Part Number

AUSPLGUN-H

Stock on Hand

97



Lincoln® Style Spool Gun

Part Number

AUSPLGUN-L

Stock on Hand

251



WHILE SUPPLIES LAST

Due to marketplace volatility, prices are subject to change without notice.




Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Welding Screens with Frame

- Eyelets on 4 sides
- Nylon ties to tie to frame
- Frame Height 6ft (1750mm)
- 3 widths available (4', 6', 8')
- 14 mil (0.35mm) PVC film



Opaque Curtain

SP-FC46PNF-EDB 4'L x 6'H

SP-FC66PNF-EDB 6'L x 6'H

Orange Curtain

SP-FC66PNF-O 6'L x 6'H

Frame Only

SP-F66NF For 6' x 6'



Rod Tubes

Part #

RODTUBE14 Electrode 14" (36 per case)

N399200 HVAC 18"

RODTUBE36 TIG 36"

Tools

Part #

HTKP10 10" Cobra Style Box joint Pliers

HTSM09 8" Sheet Metal Locking Pliers

HTWP09 9" U-Shaped Locking Pliers



J Clamps



Part Number

2400 PSI

HT2412J 12"

HT2420J 20"

Balloon Fillers

Part Number

REGBAL580G

Part Number

REGBALDual



While Supplies Last



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Welding Pipe Stands

Inweld
Welding Alloys & Supplies

AVAILABLE NOW!

Pipe Stand S-Type Standard-J

- V-head
- T-handle for extra safety in securing V-head
- Heavy duty legs
- Wider tripod leg gap for extra stability
- 23.59 lbs (10.7 kg)
- Box size: 7.75" x 8.75" x 34.5"
(197 x 222 x 876 mm)
- Similar to BB3900
- Load capacity: 2500 lbs (1135 kg)

High Position

47" (1190 mm)

Low Position

29" (735 mm)



22.25" (565 mm)

Part #

PJ2947FLD

Call for Volume Pricing

Due to marketplace volatility, prices are subject to change without notice.



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Oxy / Acetylene Cylinder Cart

Inweld
Welding Alloys & Supplies



- Designed to work on rougher terrain than other small and medium series carts
- 10" pneumatic wheels (with no flat additive)
- Uses a perma clamp to secure its load
- Continuous handle
- 45" H x 30" W
- 19" x 10" base
- 30 lbs.
- 800 lb load capacity
- Assembly required
- Comparable to Saf-T-Cart™ Model 821-10



Part Number

**Stock on
Hand**

CYC191042A10

275

WHILE SUPPLIES LAST

Due to marketplace volatility, prices are subject to change without notice.



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Gro Flow Regulator and Timer



GroFlo CO2 regulator with electronic solenoid valve with flowmeter and regulator combined into a compact CO2 delivery unit for all your Greenhouse needs. CGA 320 Flowmeter .5 to 15 SCF/Hour.



Part Number	Stock on Hand
N3020024	137



GroFlo digital timer with 8 programmable schedules for your CO2 delivery needs. 15 AMPS/125 Volts/60 HZ.

Part Number	Stock on Hand
N3020025	51

WHILE SUPPLIES LAST

Due to marketplace volatility, prices are subject to change without notice.



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012