


Fire Up Your Sales!

Inweld[®]

Welding Alloys & Supplies

Tip Dip

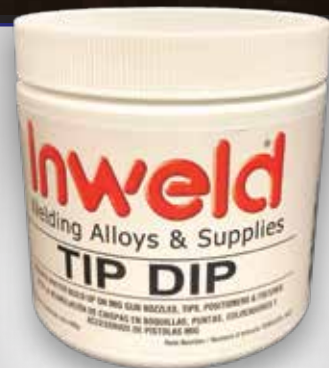

Part Numbers
TDNOZGEL160Z

Description
Tip Dip (BLUE) 400 gram - Jar (12/case)



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Mild Steel Welding Electrodes



Inweld 6011



- All-Position, Multiple-Pass Mild Steel Electrode
- strong arc force and fast solidification of weld metal
- Designed to provide the deepest penetrating welds while using small AC welding machines as well as DC types
- High Deposition efficiency and non-porous welds even over rusty or oily steel or where there is a problem of poor groove fit-up
- Great electrode to use with minimal preparation
- Common uses: many general structures such as car and truck frames, farm implements, tractors, trailer frames, storage tanks, and galvanized steel.

Part

Description

WE6011093
WE6011125
WE6011156

E 6011 3/32 x 10lb electrode AWS A5.1
 E 6011 1/8 x 10lb electrode AWS A5.1
 E 6011 5/32 x 10lb electrode AWS A5.1

Inweld 7018

1,800 lbs per pallet



- General purpose, all-position electrode for welding carbon steel, free machining steel, high tensile steel, and low alloy steel
- Excellent charpy impact values at sub-zero temperatures (65 ft-lbs at -20°)
- Typical applications include tramp steels, structural and fabrication steels such as beams, angles, channels and plates, cast steels, process piping steels, cold rolled steel, and shipbuilding steels



Part

Description

WE7018093
WE7018125
WE7018156

E 7018 3/32 x 10lb electrode AWS A5.1 H4
 E 7018 1/8 x 10lb electrode AWS A5.1 H4
 E 7018 5/32 x 10lb electrode AWS A5.1 H4



Pennsylvania
 3962 Portland Street
 Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
 © Inweld Corporation

Texas
 9300 Lawndale St.
 Houston, TX 77012

Mild Steel Welding Electrodes



- Vacuum sealed
- Graphite tip electrodes
- Reliable quality
- SDS available
- Actual certs / MTR's
- Other diameters available

E6022

WE6022125
WE6022156

For burn-through spot welding of roof decking to support beams

6022 1/8 x 10lb Electrode AWS A5.1 E6022
6022 5/32 x 10lb Electrode AWS A5.1 E6022

Formulated specifically for welding pipe lines and is an excellent alternative to standard 6010 type pipe electrodes.

E7010-A1

WE7010A1093
WE7010A1125
WE7010A1156

E 7010-A1 3/32 x 10lb electrode AWS A5.5 E7010A1
E 7010-A1 1/8 x 10lb electrode AWS A5.5 E7010A1
E 7010-A1 5/32 x 10lb electrode AWS A5.5 E7010A1

Easy to use, high speed electrode for welding carbon and low alloy steels.

E7014

WE7014093
WE7014125
WE7014156
WE7014187

E 7014 3/32 x 10lb electrode AWS A5.1 E7014
E 7014 1/8 x 10lb electrode AWS A5.1 E7014
E 7014 5/32 x 10lb electrode AWS A5.1 E7014
E 7014 3/16 x 10lb electrode AWS A5.1 E7014

High speed rutile and iron powder coated electrode used for single pass welding on horizontal or flat fillet welds.

E7024

WE7024093
WE7024125
WE7024156
WE7024187

E 7024 3/32 x 10lb electrode AWS A5.1 E7024
E 7024 1/8 x 10lb electrode AWS A5.1 E7024
E 7024 5/32 x 10lb electrode AWS A5.1 E7024
E 7024 3/16 x 10lb electrode AWS A5.1 E7024

Designed for welding quenched and tempered steels such as HY-80, HY-100, T-1, and SSS.

E11018M

WE11018M093
WE11018M125
WE11018M156
WE11018M187

E 11018M 3/32 x 10lb electrode AWS A5.5 E11018M
E 11018M 1/8 x 10lb electrode AWS A5.5 E11018M
E 11018M 5/32 x 10lb electrode AWS A5.5 E11018M
E 11018M 3/16 x 10lb electrode AWS A5.5 E11018M



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Manual Arc Overstock



Part

Lugs

CL3040

Inweld Large Solder on Lugs - 3/0-4/0 Cable Size, 250A, 21/32" Stud Hole, Bulk

CL3040BP

Inweld Large Solder on Lugs - 3/0-4/0 Cable Size, 250A, 21/32" Stud Hole, Boxed, 5/per

CL3040CS

Inweld Large Solder on Lugs - 3/0-4/0 Cable Size, 250A, 21/32" Stud Hole, Clamshell 5/per

CLH1020BP

Inweld Med. Hammer on Lugs - 1/0-2/0 Cable Size, 225A, 21/32" Stud Hole, Boxed, 5/per

Splicers

CS1020

Inweld Solder On Cable Splicer for 1/0-2/0 Cable, 5/per pack

CSH1020

Inweld Hammer On Cable Splicer for 1/0-2/0 Cable, Bulk

Cable Connectors

CRTP41BP

Male 3/0-4/0 T Series Cable Connectors Tweco® 4-MPC Compatible, Boxed, 2/per

CRTP4CS

3/0-4/0 T Series Cable Connectors Tweco® 4-MPC Compatible, 1 Set Boxed (Male & Female)

Description



Part

Electrode Holders

EHRAF200CS

200 AMP Lenco® Style Electrode Holder, Clamshell Packaging

EHRAF500BP

500 AMP Lenco® Style Electrode Holder (Similar to AF-50), Boxed

EHT350

350 AMP Tweco® Style Electrode Holder (Similar to A-14), Bulk

EHT350CS

350 AMP Tweco® Style Electrode Holder (Similar to A-14), Clamshell Packaging

Ground Clamps

GCJ500BP

500 AMP Jackson® Style Copper Ground Clamp (similar to GC-5), Blister Packaging

GCL200BP

200 AMP Lenco® Style Copper Ground Clamp (similar to Model-200), Boxed

GCW200BP

200 AMP Lenco® EG Style Steel Ground Clamp W Series (similar to EG-200), Boxed

GCW500

500 AMP Lenco® EG Style Steel Ground Clamp W Series (similar to EG-500), Bulk

GCW500CS

500 AMP Lenco® EG Style Steel Ground Clamp W Series (similar to EG-500), Clamshell

Description

WHILE SUPPLIES LAST

Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Stainless Steel Welding Wire



Part Numbers

Description

308L 308L is usable in similar 308 applications with improved resistance to intergranular corrosion due to lower carbon content. AISI types 308, 308, 321 and 347

- 25308L030** ER 308L 0.030" x 25lb Spool AWS A5.9 308L
- 25308L035** ER 308L 0.035" x 25lb Spool AWS A5.9 308L
- 25308L045** ER 308L 0.045" x 25lb Spool AWS A5.9 308L

308LSi 308LSi is a high silicon version of 308L. The higher silicon gives arc stability and exceptionally smooth bead appearance. Weld requires little or no finishing work. May be used with CO2 gas in some applications

- 36308LSi045** ER 308LSi 0.045" x 36" AWS A5.9 308LSi
- 36308LSi062** ER 308LSi 1/16" x 36" AWS A5.9 308LSi
- 36308LSi093** ER 308LSi 3/32" x 36" AWS A5.9 308LSi
- 36308LSi125** ER 308LSi 1/8" x 36" AWS A5.9 308LSi
- 36308LSi156** ER 308LSi 5/32" x 36" AWS A5.9 308LSi

309L 309L has the same qualities as Inweld 309 but with the lower carbon content deemed necessary in many chemical applications

- 36309L045** ER 309L 0.045" x 36" AWS A5.9 309L
- 36309L062** ER 309L 1/16" x 36" AWS A5.9 309L
- 36309L093** ER 309L 3/32" x 36" AWS A5.9 309L
- 36309L125** ER 309L 1/8" x 36" AWS A5.9 309L
- 36309L156** ER 309L 5/32" x 36" AWS A5.9 309L

309LSi 309LSi wire is recommended for 309 and 309 to low alloyed steel where excellence of weld contour can be attained without post-weld grinding. Higher silicon helps insure arc stability

- 36309LSi045** ER 309LSi 0.045" x 36" AWS A5.9 309LSi
- 36309LSi062** ER 309LSi 1/16" x 36" AWS A5.9 309LSi
- 36309LSi093** ER 309LSi 3/32" x 36" AWS A5.9 309LSi
- 36309LSi125** ER 309LSi 1/8" x 36" AWS A5.9 309LSi
- 36309LSi156** ER 309LSi 5/32" x 36" AWS A5.9 309LSi

310-16 310-16 is ideal for joining and overlaying dissimilar steels such as stainless to carbon and low alloy steel as well as to air hardening and armor steel.

- WE31016093** 310-16 3/32 x 10 lb Electrode AWS A5.4 E310-16
- WE31016125** 310-16 1/8 x 10 lb Electrode AWS A5.4 E310-16
- WE31016156** 310-16 5/32 x 10 lb Electrode AWS A5.4 E310-16
- WE31016187** 310-16 3/16 x 10 lb Electrode AWS A5.4 E310-16



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Stainless Steel Welding Wire



Part Numbers

Description

The most versatile All-Position stainless steel electrode. Excellent choice on 312-16 difficult-to-weld steels such as air-hardening steel, medium and high carbon steels.

WE31216062	312-16 1/16 x 8 lb Electrode AWS A5.4 E312-16
WE31216093	312-16 3/32 x 10 lb Electrode AWS A5.4 E312-16
WE31216156	312-16 5/32 x 10 lb Electrode AWS A5.4 E312-16
WE31216187	312-16 3/16 x 10 lb Electrode AWS A5.4 E312-16

Affords the same characteristics as 316L. Low carbon in the weld metal gives excellent assurance against intergranular corrosion. High silicon content allows better arc stability along with minimal post-weld grinding.

25316LSI030	ER 316LSi 0.030" x 25lb Spool AWS A5.9 316LSi
25316LSI035	ER 316LSi 0.035" x 25lb Spool AWS A5.9 316LSi
25316LSI045	ER 316LSi 0.045" x 25lb Spool AWS A5.9 316LSi

this filler metal reduces the possibility of intergranular carbide precipitation. This increases the resistance to inter-granular corrosion without the use of stabilizers such as niobium or titanium.

WE317L16093	317L-16 3/32 x 10 lb Electrode AWS A5.4 E317L-16
WE317L16125	317L-16 1/8 x 10 lb Electrode AWS A5.4 E317L-16
WE317L16156	317L-16 5/32 x 10 lb Electrode AWS A5.4 E317L-16

Used for joining similar composition stainless and cast steels with 13% chromium. It is also used for the surfacing of carbon steels to resist abrasion, erosion and corrosion.

WE41016093	410-16 3/32 x 10 lb Electrode AWS A5.4 410-16
WE41016125	410-16 1/8 x 10 lb Electrode AWS A5.4 410-16
WE41016156	410-16 5/32 x 10 lb Electrode AWS A5.4 410-16
WE41016187	410-16 3/16 x 10 lb Electrode AWS A5.4 410-16

Used primarily to weld duplex stainless steels which contain approximately 22 percent of chromium (grade 2205).

WE220916093	E 2209-16 3/32 x 10 lb Electrode AWS A5.4 2209-16
WE220916125	E 2209-16 1/8 x 10 lb Electrode AWS A5.4 2209-16
WE220916156	E 2209-16 5/32 x 10 lb Electrode AWS A5.4 2209-16



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

IN STOCK!



Twin Hose

Grade R

- For Acetylene gas only
- Tube and Cover Are Not Flame And Oil Resistant



Grade T

- For Use with All Fuel Gases



Part Numbers

Description


Case Qty.

Grade R

HTD1425BB	Twin Hose Grade R 1/4 x 25' BB Fittings	10
HTD1450BB	Twin Hose Grade R 1/4 x 50' BB Fittings	5
HTD14100BB	Twin Hose Grade R 1/4 x 100' BB Fittings	2
HTD14RE	Twin Hose Grade R 1/4 x 600' Coil	1

Grade T

HTDT1425BB	Twin Hose Grade T 1/4 x 25' BB Fittings	10
HTDT1450BB	Twin Hose Grade T 1/4 x 50' BB Fittings	5
HTDT14100BB	Twin Hose Grade T 1/4 x 100' BB Fittings	2
HTDT14RE	Twin Hose Grade T 1/4 x 600' Coil	1



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Twin Hose



Grade R

- For Acetylene gas only
- Tube and Cover Are Not Flame And Oil Resistant



Grade T

- For Use with All Fuel Gases

Part Numbers	Description	Case Qty.
Grade R		
HTD3825BB	Twin Hose Grade R 3/8 x 25' BB Fittings	10
HTD38100BB	Twin Hose Grade R 3/8 x 100' BB Fittings	2
Grade T		
HTDT3825BB	Twin Hose Grade T 3/8 x 25' BB Fittings	10
HTDT3850BB	Twin Hose Grade T 3/8 x 50' BB Fittings	5
HTDT38100BB	Twin Hose Grade T 3/8 x 100' BB Fittings	2

WHILE SUPPLIES LAST



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

Inweld Copper Alloys



Part Numbers

Description

Silicon Bronze

Best known for welding plain or galvanized steel sheet metal. Principal applications include MIG, TIG or oxyacetylene welding of copper, copper-silicon and copper-zinc base metals to themselves and to steel. Also used for surfacing parts that may be exposed to a corrosive environment.

10SILBR023	Silicon Bronze 0.023" x 10 lb Spool AWS A5.27 ERCuSi-A
10SILBR035	Silicon Bronze 0.035" x 10 lb Spool AWS A5.27 ERCuSi-A
10SILBR045	Silicon Bronze 0.045" x 10 lb Spool AWS A5.27 ERCuSi-A
10SILBR062	Silicon Bronze 1/16" x 10 lb Spool AWS A5.27 ERCuSi-A

Aluminum Bronze

Used for the joining or repairing of cast or wrought base metals of similar composition. This filler metal may also be used for surfacing applications where high resistance to corrosion or erosion or cavitation is required.

36ALBR46062	Aluminum Bronze-46 1/16" x 36" AWS A5.7 ERCuNiAl NIBRAL
36ALBR46093	Aluminum Bronze-46 3/32" x 36" AWS A5.7 ERCuNiAl NIBRAL
36ALBR46125	Aluminum Bronze-46 1/8" x 36" AWS A5.7 ERCuNiAl NIBRAL

Phosphorus Bronze

For joining carbon steel and cast iron parts to copper, brass and bronze. Also used for surfacing applications on shafts, pumps, impellers and propeller blades as well as for building-up bearing journals and frictional wear surfaces.

36PHBRC062	Phosphorus Bronze C 1/16" x 36" AWS A5.7 ERCuSn-C
36PHBRC093	Phosphorus Bronze C 3/32" x 36" AWS A5.7 ERCuSn-C
36PHBRC125	Phosphorus Bronze C 1/8" x 36" AWS A5.7 ERCuSn-C
36PHBRC156	Phosphorus Bronze C 5.32" x 36" AWS A5.7 ERCuSn-C



Pennsylvania
3962 Portland Street
Coplay, PA 18037


inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

MASTERWELD TW2 & TW3 STYLE MIG GUNS



**Sell MADE IN THE USA
MIG Torches**

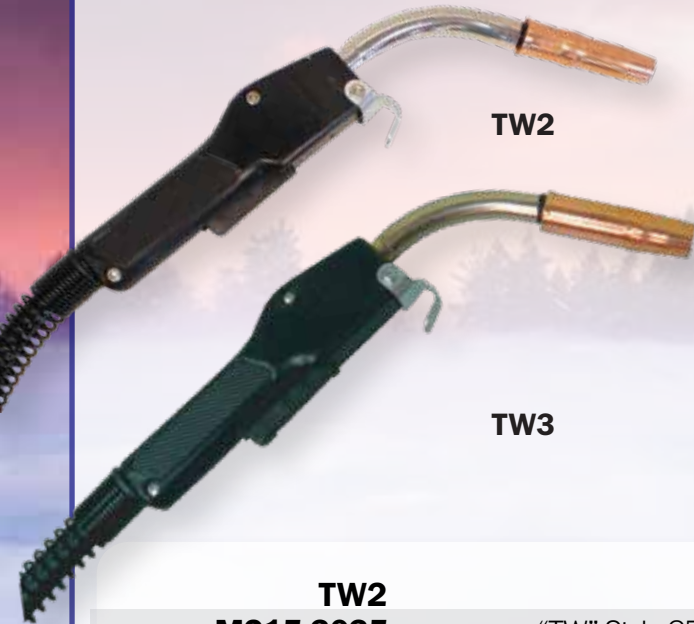

TW2

TW3

- **Rugged cable support with spring**
- **Improved rear cable support with terminal ends for interchangeable trigger leads**
- **Optional power pins to configure different machines**
- **Uses standard TW Style consumables**

TW2	Description
M215-3035	"TW" Style 250A MIG Gun, 15' .030-0.035" Liner, Miller Pin
LWM215-3035	"TW" Style 250A MIG Gun, 15' .030-0.035" Liner, Lincoln Wirematic Pin
X215-3035	"TW" Style 250A MIG Gun, 15' .030-0.035" Liner, Euro Pin
M225-4045	"TW" Style 250A MIG Gun, 25' .040-0.045" Liner, Miller Pin
LWM225-4045	"TW" Style 250A MIG Gun, 25' .040-0.045" Liner, Lincoln Wirematic Pin
X225-4045	"TW" Style 250A MIG Gun, 25' .040-0.045" Liner, Euro Pin
TW3	Description
M315-3545	"TW" Style 300A MIG Gun, 15' .035-0.045" Liner, Miller Pin
LWM315-3545	"TW" Style 300A MIG Gun, 15' .035-0.045" Liner, Lincoln Wirematic Pin
X315-3545	"TW" Style 300A MIG Gun, 15' .035-0.045" Liner, Euro Pin
M325-3545	"TW" Style 300A MIG Gun, 25' .035-0.045" Liner, Miller Pin
LWM325-3545	"TW" Style 300A MIG Gun, 25' .035-0.045" Liner, Lincoln Wirematic Pin
X325-3545	"TW" Style 300A MIG Gun, 25' .035-0.045" Liner, Euro Pin

Other connections and lengths are available



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

26 Series TIG Torch



- Air cooled TIG Torch
- Rating: 200A DC / 160A AC 0.02" to 1/8" electrodes
- 12' long power cable
- With gas valve or flex neck with gas valve
 - Fitted with teflon tip valve (VS1) for superior gas seal
- Torch kits come ready to weld with TIGPACK1826 starter consumable pack (1 each: 10N24, 10N32, 10N46, 57Y02, Lanthanated 3/32 tungsten)



46V28R



TEC50



TEC50AD26



45V62



VS1

Part #

Description

12' Packages

26V-12R

TIG Torch pack MW26V 200A 12' 1 pc cable

26FV-12R

TIG Torch pack MW26FV 200A 12' 1 pc cable

Torch Heads

26V

Torch Body With Valve MW26V

26FV

Torch Body Flexible with Valve MW26FV

Power Cables

46V28R

Power Cable Assembly 12' MW26

Handles

10N15

Handle Smooth MW18,26

10N15R

Handle Ribbed MW18,26

Adapters

45V62

Power Adapter MW26 7/8"-14 UNF to 5/8"-18 UNF RH



TEC50AD26

Adapter for MW26 TO TEC50 7/8"-14 Female to 5/8"-18 male

Dinse Connector

TEC50

Connector TIG Dinse 35-50




Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

WYPO®

Inweld
Welding Alloys & Supplies



TCSTANDARD



SSHOLDFLAT



TCKING



SSHOLDROUND


Part #
TCSTANDARD
TCKING
SSHOLDFLAT
SSHOLDROUND

Description

WYPO (1) Standard Tip Cleaner - Set of 13, Sizes 6 - 26 +file
 WYPO (4) King Tip Cleaner - Set of 13 for Larger Ports - Sizes 6 - 26 + File
 WYPO (400) Flat Holder 3/16 x 1/2 x 5" (includes 1 piece of soapstone)
 WYPO (800) Round Holder 1/4 x 5" (includes 1 piece of soapstone)



FL3021



FL3021X



FL5012X



FL3001

Part #
FL3021X
FL3021
FL3001
FL5012X

Description

Shurlite Standard Round File Renewal - 10 Flints w/2 Plastic Holders per Card
 Shurlite Standard Round File Lighter w/Renewal - 5 Flints in 1 Plastic Holder per Card
 Shurlite Universal Round File Lighter 10/box
 Shurlite Triple Flint Renewal - 4 per card



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012

JAZ[®]
SURFACE EXPERTS



Inweld[®]
Welding Alloys & Supplies

VIP Hand Brushes

- Color coded handles
Red = Steel / **Blue = Stainless** / **Green = Brass**
- Wires are crimped NOT straight for longer life and easier cleaning
- Better alternative than wooden handle scratch brushes
- Wires are wrapped around an internal post so two wire points is one wire. Never fall out like standard scratch brushes for longest life
- Versatile for many applications (welding, paint, gas grill, cleaning, etc.)
- 24 per display case



Part

Description

85100	JAZ Universal Hand Brush, Red Plastic Handle, .014" Carbon Steel Wire
85130	JAZ Universal Hand Brush, Blue Plastic Handle, .012" Stainless Steel Wire
85150	JAZ Universal Hand Brush, Green Plastic Handle, .012" Brass Wire

NOW WHOLESALING ALL **JAZ[®] PRODUCTS**



Pennsylvania
3962 Portland Street
Coplay, PA 18037

inweldcorporation.com
Phone: 800.346.5368
Fax: 877.346.5368
© Inweld Corporation

Texas
9300 Lawndale St.
Houston, TX 77012